


TDS - 2001
New Dec/25

Full Port Ball Valve
Lead-Free Compliant - Plumbing, Heating, Cooling

F1960 for PEX-A x F1960 for PEX-A

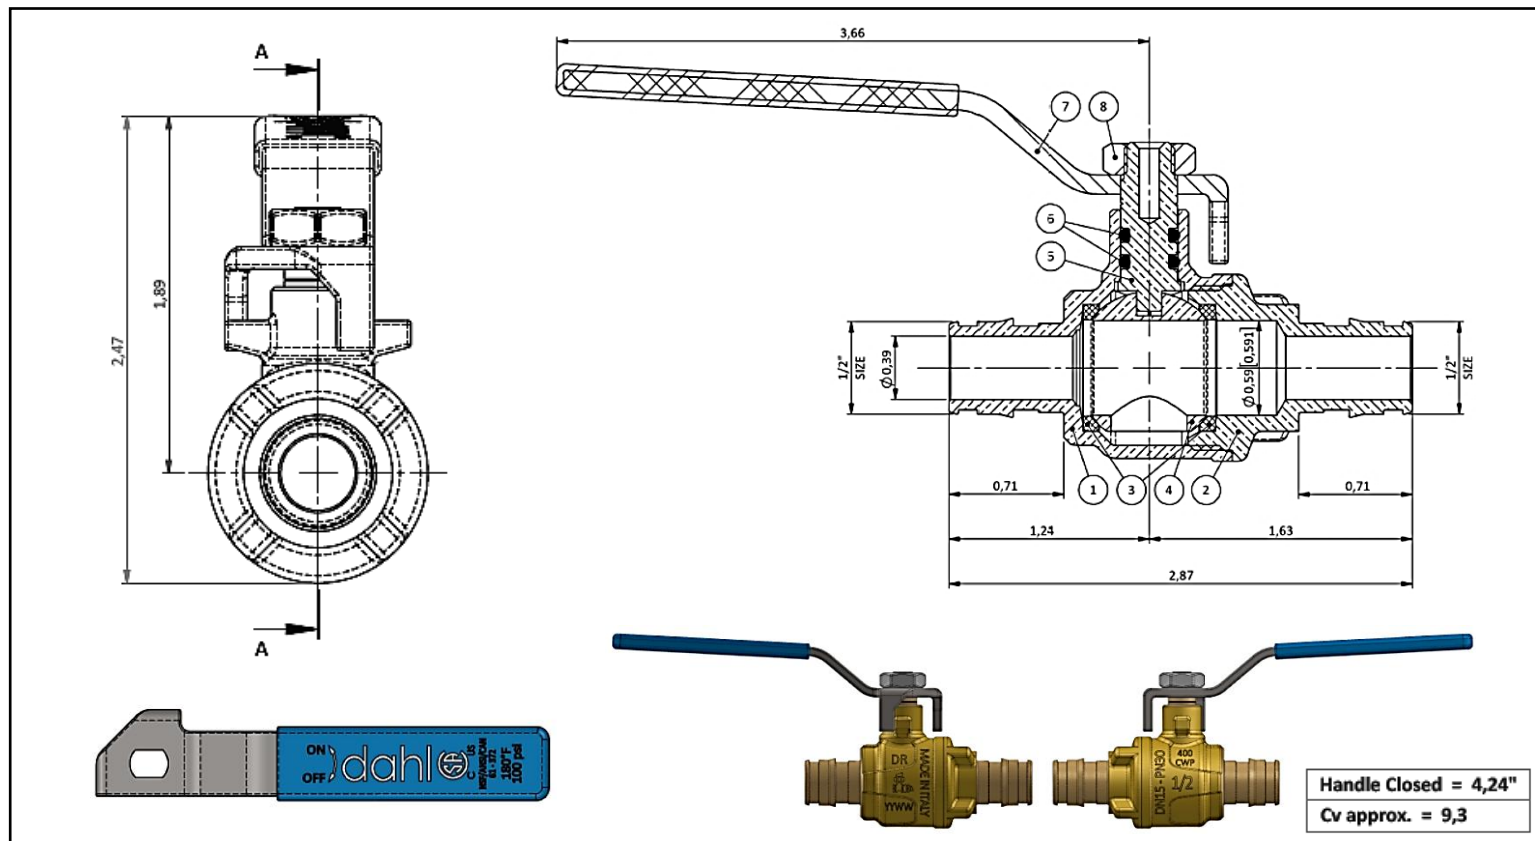

Part# 500-050-SH-AA

- | | |
|--------------------------------------|--------------------------|
| 1. Body - Brass | 5. Spindle - Brass |
| 2. End - 1/2 F1960 for PEX-A - Brass | 6. O-Rings - EPDM |
| 3. Seals - PTFE | 7. Lever Handle - Steel |
| 4. Ball - Plated Brass | 8. Nut - Stainless Steel |

Handle Closed = 4,24"
Cv approx. = 9,3

Technical Data:

Valve Rating: 400 CWP
End Connection Rating: 180°F at 100 psi, 73°F at 160 psi
Maximum Glycol Mix: 50%
Follow glycol manufacturer recommendations



Standards:

ASME A112.4.14/CSA B125.14
NSF/ANSI/CAN 61 & 372
ASTM F1960

