


TDS - 2012
New Dec/25

Full Port Ball Valve
Lead-Free Compliant - Plumbing, Heating, Cooling

COPPER x COPPER with Drain

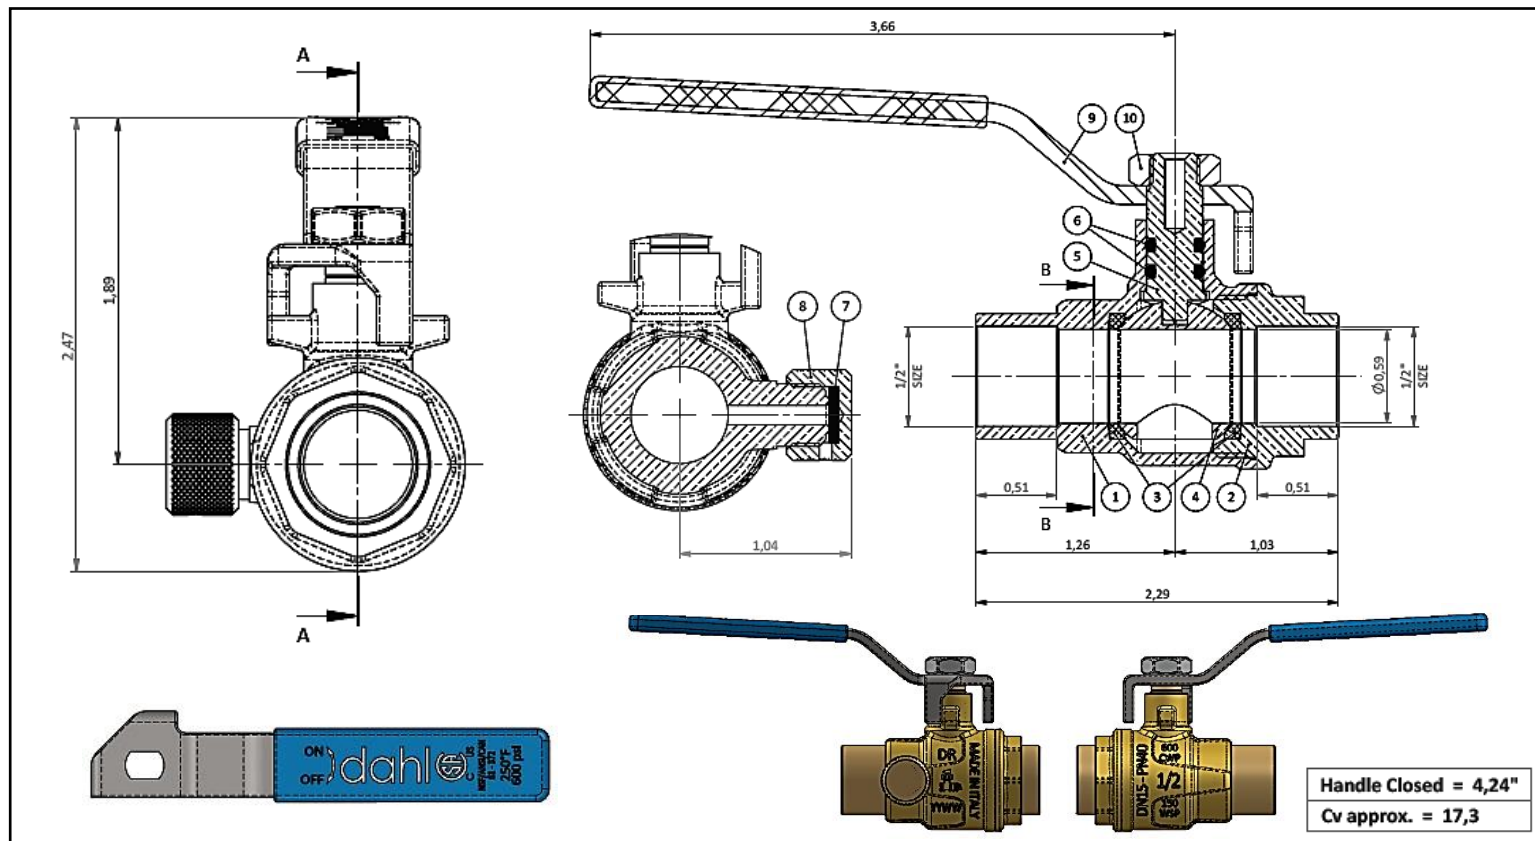

Part# 500-050-SH-SS-D

- | | |
|------------------------------------|---------------------------|
| 1. Body - Brass | 6. O-Rings - EPDM |
| 2. End - 1/2 Female Solder - Brass | 7. Gasket - EPDM |
| 3. Seals - PTFE | 8. Drain Cap - Brass |
| 4. Ball - Plated Brass | 9. Lever Handle - Steel |
| 5. Spindle - Brass | 10. Nut - Stainless Steel |

Handle Closed = 4,24"
Cv approx. = 17,3

Technical Data:

Pressure Rating: 600 CWP - 150 WSP
Temperature Rating: -4°F - 250°F
Maximum Glycol Mix: 50%
Follow glycol manufacturer recommendations



Standards:

ASME A112.4.14/CSA B125.14
NSF/ANSI/CAN 61 & 372

