


# dahl mini-ball™ Valve

Lead-Free Compliant - Plumbing, Heating, Cooling

TDS - 146-LF  
Rev Feb/26

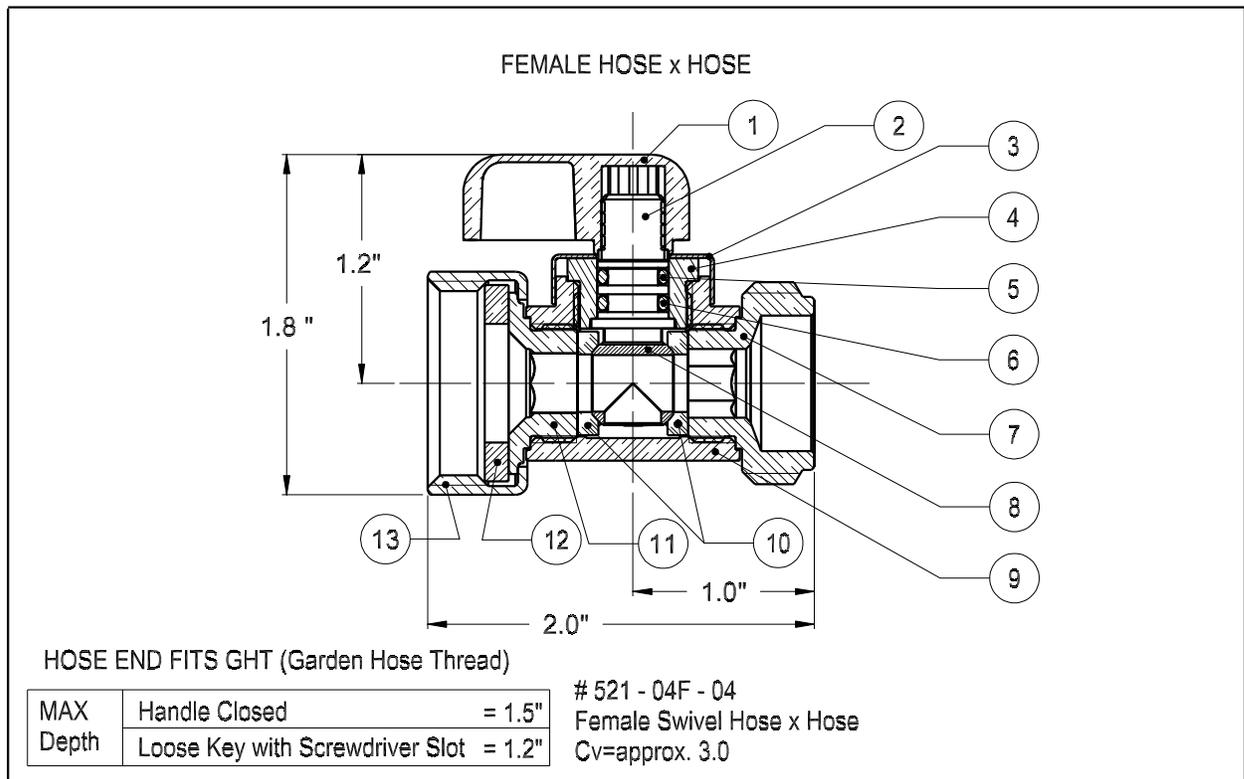

- |                                  |                                      |
|----------------------------------|--------------------------------------|
| 1. Handle - Nickel Plated Zinc   | 8. Ball - Plated Brass               |
| 2. Spindle - Nickel Plated Brass | 9. Body - Brass                      |
| 3. Handle Stop Cap - Brass       | 10. Seals - PTFE                     |
| 4. Spindle Bushing - Brass       | 11. End - Female Hose Swivel - Brass |
| 5. O-Ring - EPDM                 | 12. Gasket - EPDM                    |
| 6. O-Ring - Fluorocarbon (FKM)   | 13. Hose Coupling - Brass            |
| 7. End - Hose - Brass            |                                      |

Working Pressure: 250 psi / 250°F  
depending on pipe material.


 , UPC®  
 NSF/ANSI/CAN 61: Q≤0.5  
 NSF/ANSI/CAN 372

Designed and Manufactured in  
Canada

Also available: Loose Key with Screwdriver Slot operation

## dahl Valve Limited

2600 S. SHERIDAN WAY, MISSISSAUGA, ON, CANADA L5J 2M4  
 905-822-2330 CAN 800-268-5355 U.S. 800-268-2363  
 FAX(905) 855-1450, USA AND CANADA 800-226-1801  
[sales@dahlvalve.com](mailto:sales@dahlvalve.com) [www.dahlvalve.com](http://www.dahlvalve.com)

We reserve the right to alter prices and/or technical details without notice